

MineCore Glazed EasyTile Datasheet

LONGING MineCore

MineCore is an eco-friendly inorganic building material that can withstand continuous high operation temperatures. It is a lightweight, non-plastic and high strength product.

Glazed EasyTile is a hassle-free solution for achieving the timeless charm of mosaic tiles with grouting effects, simplifying installation and enhancing any space. Elevate your design projects effortlessly with Glazed EasyTile.

Typical Applications

Bathroom, western kitchen, coffee shop, shopping mall, supermarket and any indoor scene.

Features + Benefits





No Plastic





Moisture-resistant Formaldehyde Free



Dimensional stability



Glazed Finish



Waterproof



Grout effect



Stain Resistant



Easy to install

Complete Innovation

LONGING 2019 brings an innovative new concept to the market: aspires to be the market leader in innovative mineral building materials.

Over the years, the LONGING Glazed **EasyTile** range has continued to offer the freedom to innovate. Glazed EasyTile provides creative freedom to designers, specifiers and end users, providing safe, decorative and hygienic wall solutions as well as sanitary wall solutions that meet aesthetic and performance requirements.

Our Glazed EasyTile range offers design flexibility for any environment and any interior.

Better Together


Due to the natural materials used, MineCore can be directly landfilled without affecting soil, water quality, and air to cause continuous secondary pollution.

LONGING MineCore is truly derived from nature and belongs to nature.





Digital Printing

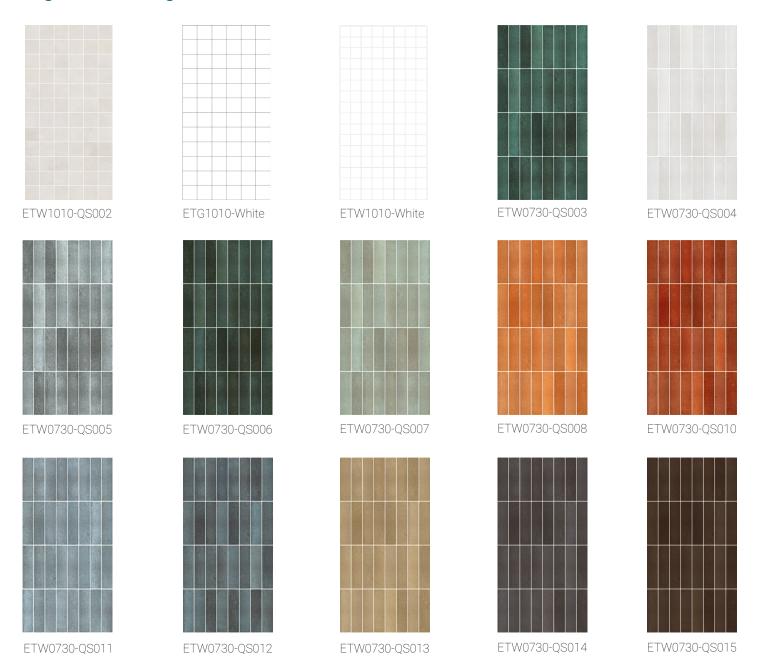

Solid Color




ETB1010-0W038-0 ETW1010-Black

ETB1010-RAL6009

ETW1010-NN1370-3

Glazed Effect









The colors depicted may slightly differ from the actual products due to variations in the printing process, please refer to the actual color.
Inquire us for more designs.


Grid



100*100mm 200*200mm 300*300mm



100*200mm 150*300mm 300*600mm



80*260mm 100*300mm 300*600mm

Seam Color









Thickness	8mm	
Dimensions	600x1200mm 24"x48" 400x800mm 16"x32" 300x600mm 12"x24"	
Fire and smoke performance	EN 13501-1:2018	Class A2 - s1, d0
Bending strength	EN 12467:2012+A2:2018	Average≥10.0MPa
Resistance to staining	EN ISO 26987:2012	Index 0, Not affected
Moisture movement	EN 12467:2012+A2:2018	Length direction: 0.06% Width direction: 0.06%
Adhesion(Cut-cross test)	ISO 2409:2020	Class 0
Pencil hardness	ISO 15184:2020	≥HB
Colour fastness to artificial light	ISO 105-B02:2014	Grade 6
Micro-scratch resistance	EN 16094:2012, Procedure A	MSR-A2
Asbestos content	NIOSH 9002:1994	Negative
Fungi resistance	ISO 846:2019	No growth











Discover more online!







CE Certificate

Installation Guide

Profile_MineCore Wall Panel_Longing

Even more great resourses:

- https://www.youtube.com/@longingglobal
- https://www.facebook.com/longingglobal
- https://www.linkedin.com/company/longingu

Follow us







- 🙎 ADD: 8 7ijing Road, Yixing City, Wuxi City, Jiangsu Province, China 214231.
- 7 Tal· +86-510-87328116 / +86-13018000228
- 슣 🛮 Email: info@longingu.com
- Website: www.longingu.com